


SMART HOTLINE PA TELEPHONE SYSTEM



SMART HOTLINE PA TELEPHONE SYSTEM has two desktop HOTLINE PA TELEPHONE UNITS Connected by single pair 2 core telephone cable with **SMART HOTLINE CONTROLLER** UNIT. All the units are AC powered (220 / 110 V AC) with built-in battery back up for uninterrupted communication.

The controller can support long loop cable resistance (of upto 1 km of 2 core .5 sq mm telephone cable) and can be placed at any location (near to any of the two DESK TOP HOTLINE PA TELEPHONE UNITS). When any of the DESK TOP HOTLINE PA TELEPHONE goes off hook second phone will be automatically activates, and whatever is said in the mouthpiece will be relayed over the loudspeaker of unit. If the paged DESKTOP HOTLINE PA TELEPHONE's handset is picked up the communication is in private mode, and the loudspeaker gets deactivated. The system will operate in vice versa for second DESK TOP HOTLINE PA TELEPHONE.

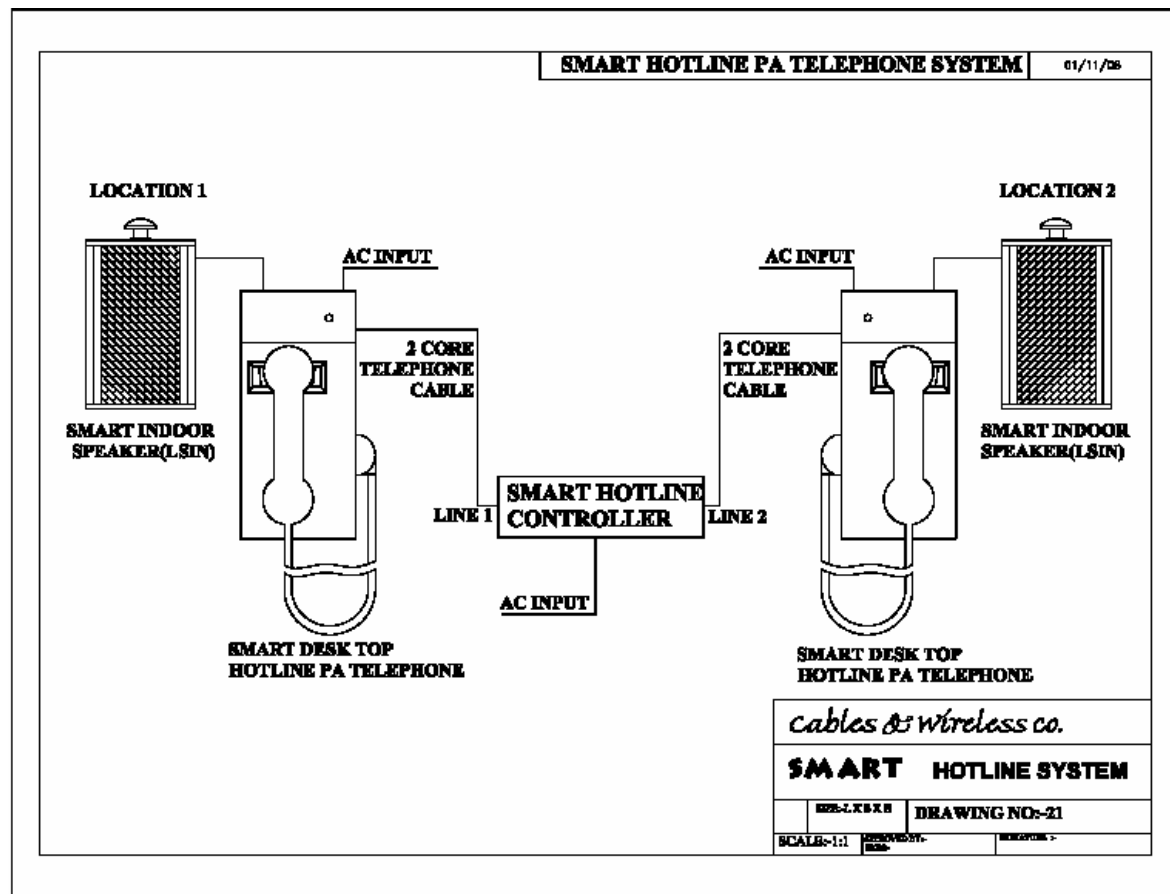

CONNECTIONS: -

1. Connect DESK TOP HOTLINE PA TELEPHONE 1 to the SMART HOTLINE CONTROLLER unit with 2 core tel cable.
2. Connect DESK TOP HOTLINE PA TELEPHONE 2 to the SMART HOTLINE CONTROLLER unit with 2 core tel cable.
3. Connect 220/110 VAC mains input to the CONTROLLER unit.
4. Connect 220/110 VAC mains input to the DESK TOP HOTLINE PA TELEPHONE unit's.
5. Switch on the supply to the SMART HOTLINE CONTROLLER & DESK TOP HOTLINE PA TELEPHONE unit's.
6. CONTROLLER & SMART HOTLINE PA TELEPHONES has online built in battery backup for continuous operation.

OPERATIONS: -

OUT GOING CALLS:-

1. Lifting the receiver of any DESK TOP HOTLINE PA TELEPHONE will activate the other UNIT.
2. Replacing the receiver on cradle disconnects the call.
3. On pick up by other party the communication is in private mode.

INCOMING CALLS:-

1. On Pick-up the handset of any DESK TOP HOTLINE PA TELEPHONE, the other unit goes automatically to paging mode.
2. Announce after picking up the handset.
3. Communication will be in PRIVATE MODE when called party lifts the receiver.
4. Replacing the receiver on cradle will reset the system.

INDUSTRIAL COMMUNICATIONS SIMPLIFIED .

Cables & Wireless Co.

FF 75 RAJAT ARCADE, MIDC T-POINT,
AMRAWATI ROAD, WADI, NAGPUR -440023.

PHONE:-07104-321913,07104-224381.

Fax:- 07104-224381.

Cell: - 098226 95746, 09225227945, 09822941190.

Website:- www.cnwcom.in. E-mail: - cnwcom@gmail.com.

"(Specifications and description subjected to change without prior notice)"