

SMARTTM

RAIL/METRO COMMUNICATIONS SIMPLIFIED

WP ANALOG PHONE

MODEL (WMHS-ERT-A)



- **STANDARD ANALOG PHONE**
- **ROBUST HOUSING**
- **STAINLESS STEEL VANDALPROOF HANDSET**
- **VERTICAL WALL MOUNT**
- **KEYPAD / NON KEYPAD MODELS**
- **HANDSET WITH NOISE CANCELING FEATURE**

SMART WEATHER PROOF TELEPHONE (WMHS-ERT)

The Emergency Rail Telephone is designed for use at Railway / Metro track line.

These phones are installed outdoor and are as per IP 65 standards


SMART DESIGN

Housed in weather proof aluminum Alloy die-casting body and manufactured to high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communication is maintained at all times.

STANDARD ANALOG

As a standard analog telephone, this unit provides basic telephone function and can be connected to any standard two wire telephone line, available in dial keypad and non dial versions.

These telephones are fully line powered and do not require any battery or external power source.

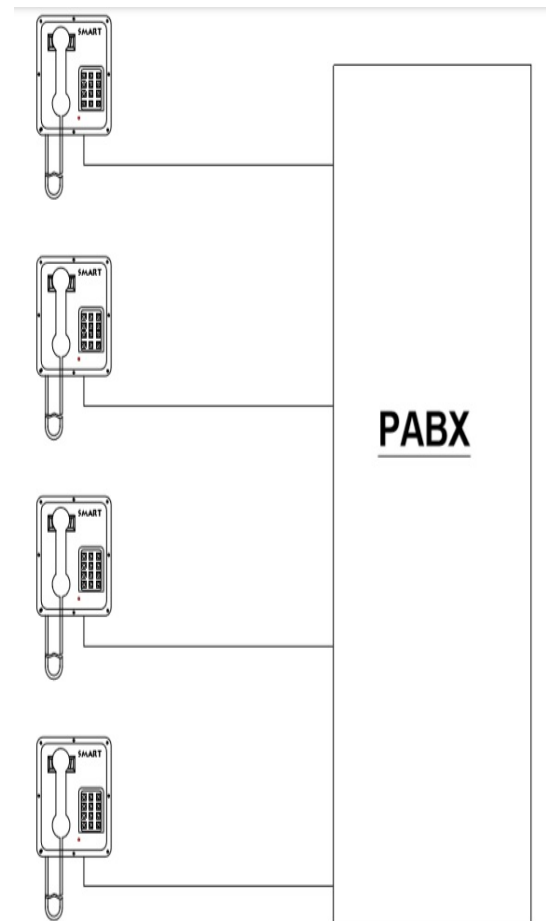

SPECIFICATIONS: -

Electrical requirements



Ringer sensitivity	40 - 100 V @ 16 - 25 Hz.
Line voltage	24 - 56 VDC.
Loop current	20 - 120 mA.
Connection method	PCB terminal block.
Fuse	0.25 Amp 2AG fast blow.

Environmental

Temperature	0 to +60 C.
Humidity	0 to 95% Rh non-condensing.
Dustproof enclosure	Fully gasketted.

Mechanical

Hook switch (magnetic reed) life	>1 000 000 operations.
Body construction	AL alloy, powder coated.
Dimensions	280X 250 X 70 mm.
Net weight	2 kgs.
Handset material	High impact ABS.
Microphone	Noise reducing dynamic.
Standard mounting	Vertical wall.
Handset cord	Stainless steel.

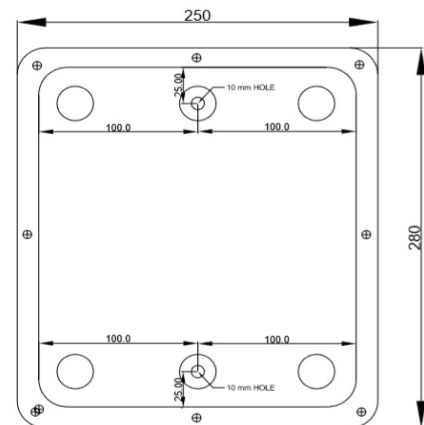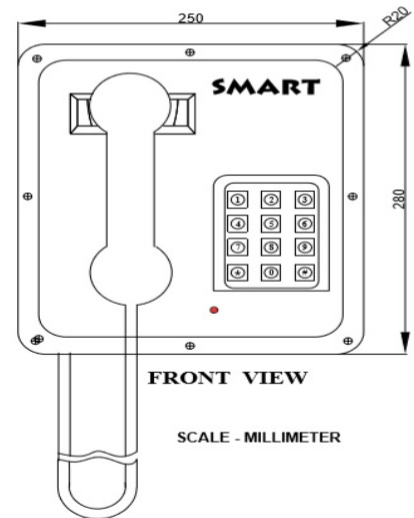

cables & wireless co.

FF 75 RAJAT ARCADE, MIDC T-POINT,
AMRAWATI ROAD, WADI,
NAGPUR -440023.MAHARASHTRA, INDIA.

PHONE:- +917104-224381
FAX:- +917104-224381.
Cell: - +9198226 95746, +919822941190

Website:- www.cnwcom.in

E-mail: - cnwcom@gmail.com.

“(Specifications and description subjected to change without prior notice)”